


430LPH IN A COMPACT 38MM PUMP

OPTIMIZED PUMP TECHNOLOGY

- Optimum impeller blade count and angle for peak efficiency at the target flow rate
- Advanced carbon matrix commutators for increased durability in E85 and race fuels
- Fluid dynamics engineered to eliminate turbulence and reduce restrictions
- Digitally balanced armature to extend bearing life and decrease NVH
- Integrated check valve to keep fuel system pressurized and avoid hard starts



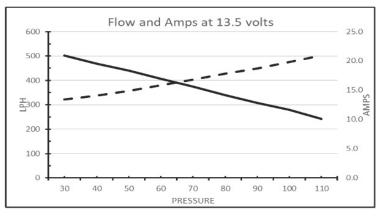

All the same popular fitments as the DW300c & DW65c. 20+ PNs

WWW.DEATSCHWERKS.COM 405.217.0701 / 800.419.6023

